



**Diamond  
Controls**

Leak Detection & Trace Heating Systems

**DATASHEET**

**WATER LEAK DETECTION**



# AT-350A

## Internal Cistern Overflows

When connected to an AquiTron alarm panel the system will electronically monitor individual cistern overflows. In the event of an overflow condition arising the system will provide a local alarm with a general alarm to the BMS. AquiTron overflow sensors are fitted to each WC cistern. The overflow sensors are wired to the locally positioned AquiTron monitoring panel/s. Options are available allowing for up to 8 separate sensing zones to be monitored on a single panel.





### SIMPLE OPERATION


The system is designed to alert building management personnel with an audible and visual warning, to the wasteful discharge of overflowing water, directly to WC pans, by 'internal WC cistern overflows'. A sensor is inserted into the overflow hole at the side or top of concealed WC cisterns that incorporate an internal overflow arrangement discharging to the WC pan. The sensor detection level can be set to occur at a point when an overflow situation is imminent but before water is wastefully discharged to the WC pan. Sensors are available for standard concealed and Geberit type WC cisterns. Sensors in an overflow alarm condition are identified separately on the panel display, an audible alarm is also activated. Signals are conveyed to the Indicator Panel with low voltage twin cable. Please see the relevant alarm panel datasheet for more detailed information regarding the AT-SZA and AT MZA.

### VERSATILE DESIGN

The sensors comprise of stainless-steel electrodes housed in a 3/8" BSP uPVC connector for fitting directly into the side or top overflow connection of concealed WC flushing cisterns. For exposed porcelain cisterns the sensor can be fitted to a pre- drilled 22mm diameter hole.

### APPLICATION

Low voltage electrical terminals are fitted to the sensors for wiring to the AT-MZA or AT-SZA panels. The system is simply installed without the need for special test equipment or on-site calibration. The low voltage wiring is installed in a continuous length between each sensor and the local indicator panel, without any intermediate terminals or connections.

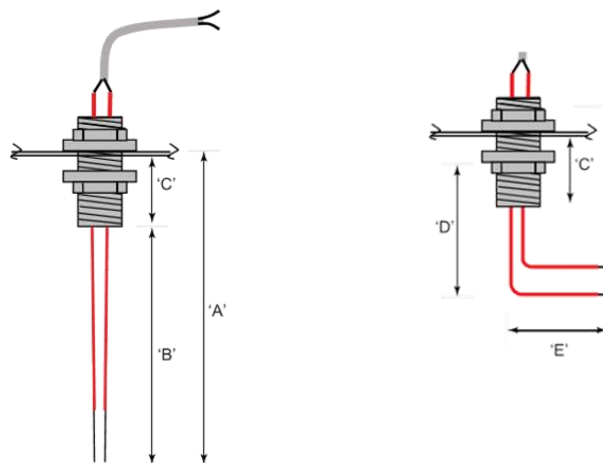

**Diamond Controls Ltd.**  
Unit 5, Baines Way,  
Norwich, Norfolk,  
NR5 9JR

**Contact**  
01603 745000  
[sales@diamondcontrols.co.uk](mailto:sales@diamondcontrols.co.uk)  
[www.diamondcontrols.co.uk](http://www.diamondcontrols.co.uk)

VAT number: 797 771 750  
Registered company: 4113848



Procedure:	OPS08	Document ref:	AT350	Publish date:	18/06/24	Approved by:	Lee Blackett	Review date:	As Required
------------	-------	---------------	-------	---------------	----------	--------------	--------------	--------------	-------------



### TECHNICAL INFORMATION

<b>Power supply (alarm panel)</b>	230Vac, 50Hz, 3A
<b>Recommended sensor cable size</b>	16 / 0.2mm min, 2 core
<b>Dimensions - Sensor</b>	3/8" BSP thread, Min opening dia 17mm A)130mm, B) 91mm, C) 39mm, D) 44mm, E) 56mm
<b>Probe</b>	Stainless Steel 316
<b>Connections</b>	2 spade crimp connectors provided. *Optional - special order version available with a 2 core 1meter cable.
<b>Resetting</b>	Allow probe to dry completely before re-use. Probes not designed for permanent submersion.

### ORDERING INFORMATION

Catalogue Number	Product Description
2431	AT-350A 'Overflow' Monitoring System

**Important:** All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application.

#### Diamond Controls Ltd.

Unit 5, Baines Way,  
Norwich, Norfolk,  
NR5 9JR

VAT number: 797 771 750  
Registered company: 4113848

#### Contact

01603 745000  
[sales@diamondcontrols.co.uk](mailto:sales@diamondcontrols.co.uk)  
[www.diamondcontrols.co.uk](http://www.diamondcontrols.co.uk)



<b>Procedure:</b>	OPS08	<b>Document ref:</b>	AT350	<b>Publish date:</b>	18/06/24	<b>Approved by:</b>	Lee Blackett	<b>Review date:</b>	As Required
-------------------	-------	----------------------	-------	----------------------	----------	---------------------	--------------	---------------------	-------------